

PICTURED STANDARD OPTIONS

- Smoke stain
- Square header end detail
- 5/15 roof pitch
- Shingle roofing, 2' & 2' 6"
- 3',  $4' \times 8'$  braces with curve
- 2 piece small post base

## PICTURED UPGRADES

- 36 × 36 cedar cupola with coppertone roof
- Paver stone columns on back two posts
- Paver wall on back side


The quality timber construction; treated floors; ULS high build satin, low VOC penetrating stain; and 40-year metal roofing of this budget option make it a frontrunner in the market. A smart budget choice for sure.





## Standard Construction

- $6' \times 6'$  Post &  $6' \times 8'$  Tongue & Groove Headers
- 2' × 4' Rafters, 24" on Center
- **Roof Decking**
- Ag Metal or Asphalt Shingles
- Pre-cut, Pre-stained

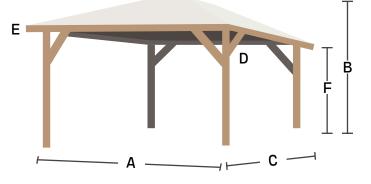

## **Specifications**

to bottom of header

AVAILABLE SIZES:								
	10'	12'	14'	16'	18'	20'	24'	
A	Outside of roof to outside of roof standard overhang is 16"							
	12'	14'	16'	18'	20'	22'	26'	
В	Overall height. Standard roof pitch is 5/15							
	11'	11'5"	11'10"	12'3"	12'8"	13'1"	13'11"	
С	Outsi	Outside of post to outside of post						
	10'	12'	14'	16'	18'	20'	24'	
D	Brace size (available in 2', 2' 6", 3')							
Ε	Header end detail. See page 25							
F	8' standard post length. Post length = distance							

11

<sup>\*</sup>Any pavilion larger than 20'  $\times$  20' will require additional post on eve side.