
## Shedology 101



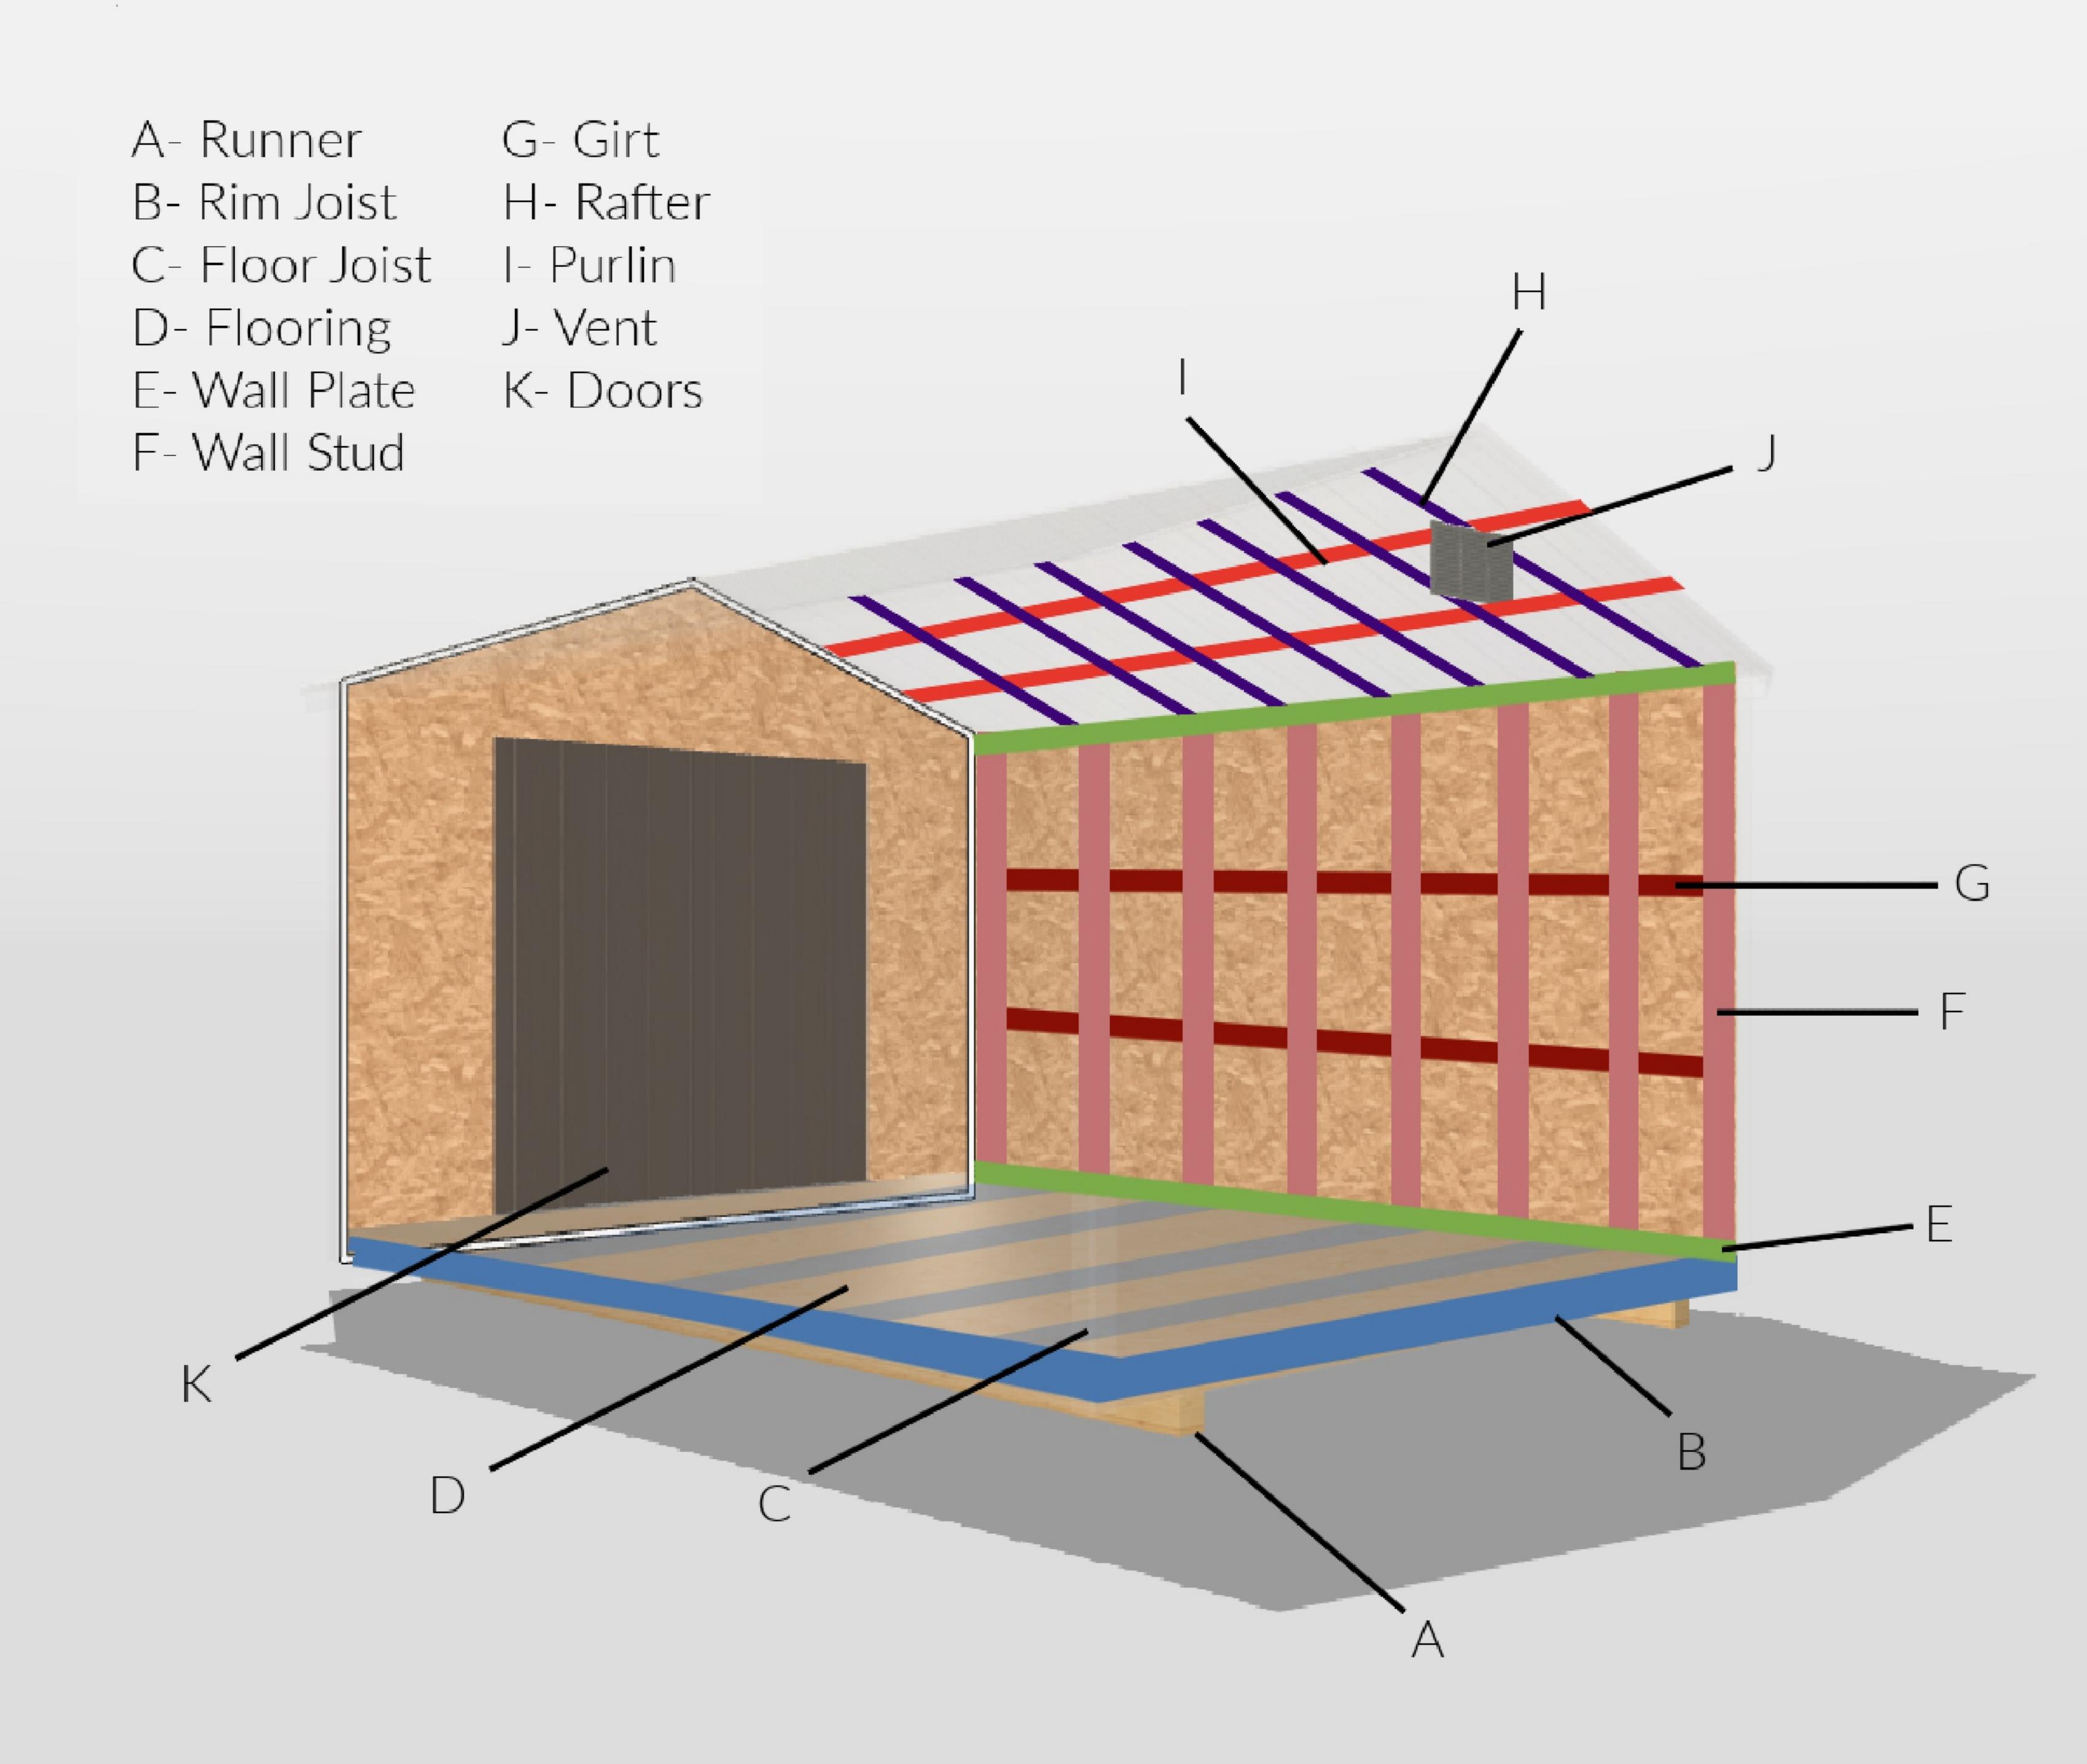

\*\*This diagram shows commonly referred to components and does not show all components that may make up a building. This is a generic diagram and it is important to remember all builders/brands construct their buildings differently. If you have a question regarding a particular component please reach out to your local sales rep, check out the models additional specifications on our website, or call us (270) 789 - 4236.

## Additional Specifications Superior - Tack Room

Wall Specs		
Wall Height	7' 6" Front Wall Height (Approx 72") & 6' 4" Rear Wall Height (Approx 76.5")	
Stud Type	2"x4"	
Stud Spacing	16" o.c (Doubled Every 4')	
Siding	5/8" Premium Quality T-111 Siding	
Trim	Treated Trim Board	
Sheathing	None	
Vents	(2) 8"x16" metal vents placed at each gable & roof ridge vent.	

	Roof Specs
Roof Pitch	"Salt Box" Style (19 Degree Back)
Rafter Type	2"x4"
Rafter Spacing	16" o.c
Roof Type	Mac Metals - Mac Life (A) WeatherXL 29 Gauge or 3D Architectural Shingles
Sheathing	7/16" OSB

	Floor Specs
Joist Type	8' & 12' Wide - 2'x4' / 10' & 14' Wide -2'x6'
Joist Spacing	16" o.c
Flooring	3/4" Tongue & Groove "Advantech" or its equivialent
Runners	4"x6" Pressure Treated Runners, Notched
Runner #	8' & 10' Wide - 2 Runners / 12' & 14' Wide - 4 Runners



## Additional Specifications Superior - Tack Room

Door Specs		
Standard Door	12' Long - 4' Door / 16' Long & Longer - 6' Double Doors	
Door Opening	4' Door - Approx 48" / 6' Double Doors - Approx 72"x78"	
	Heavy Duty Aluminum Diamond Plate	

Standard Features		
(2) 2'x3' White Aluminum Gridded Windows		





## Cedar Naturaltone



