
## Shedology 101



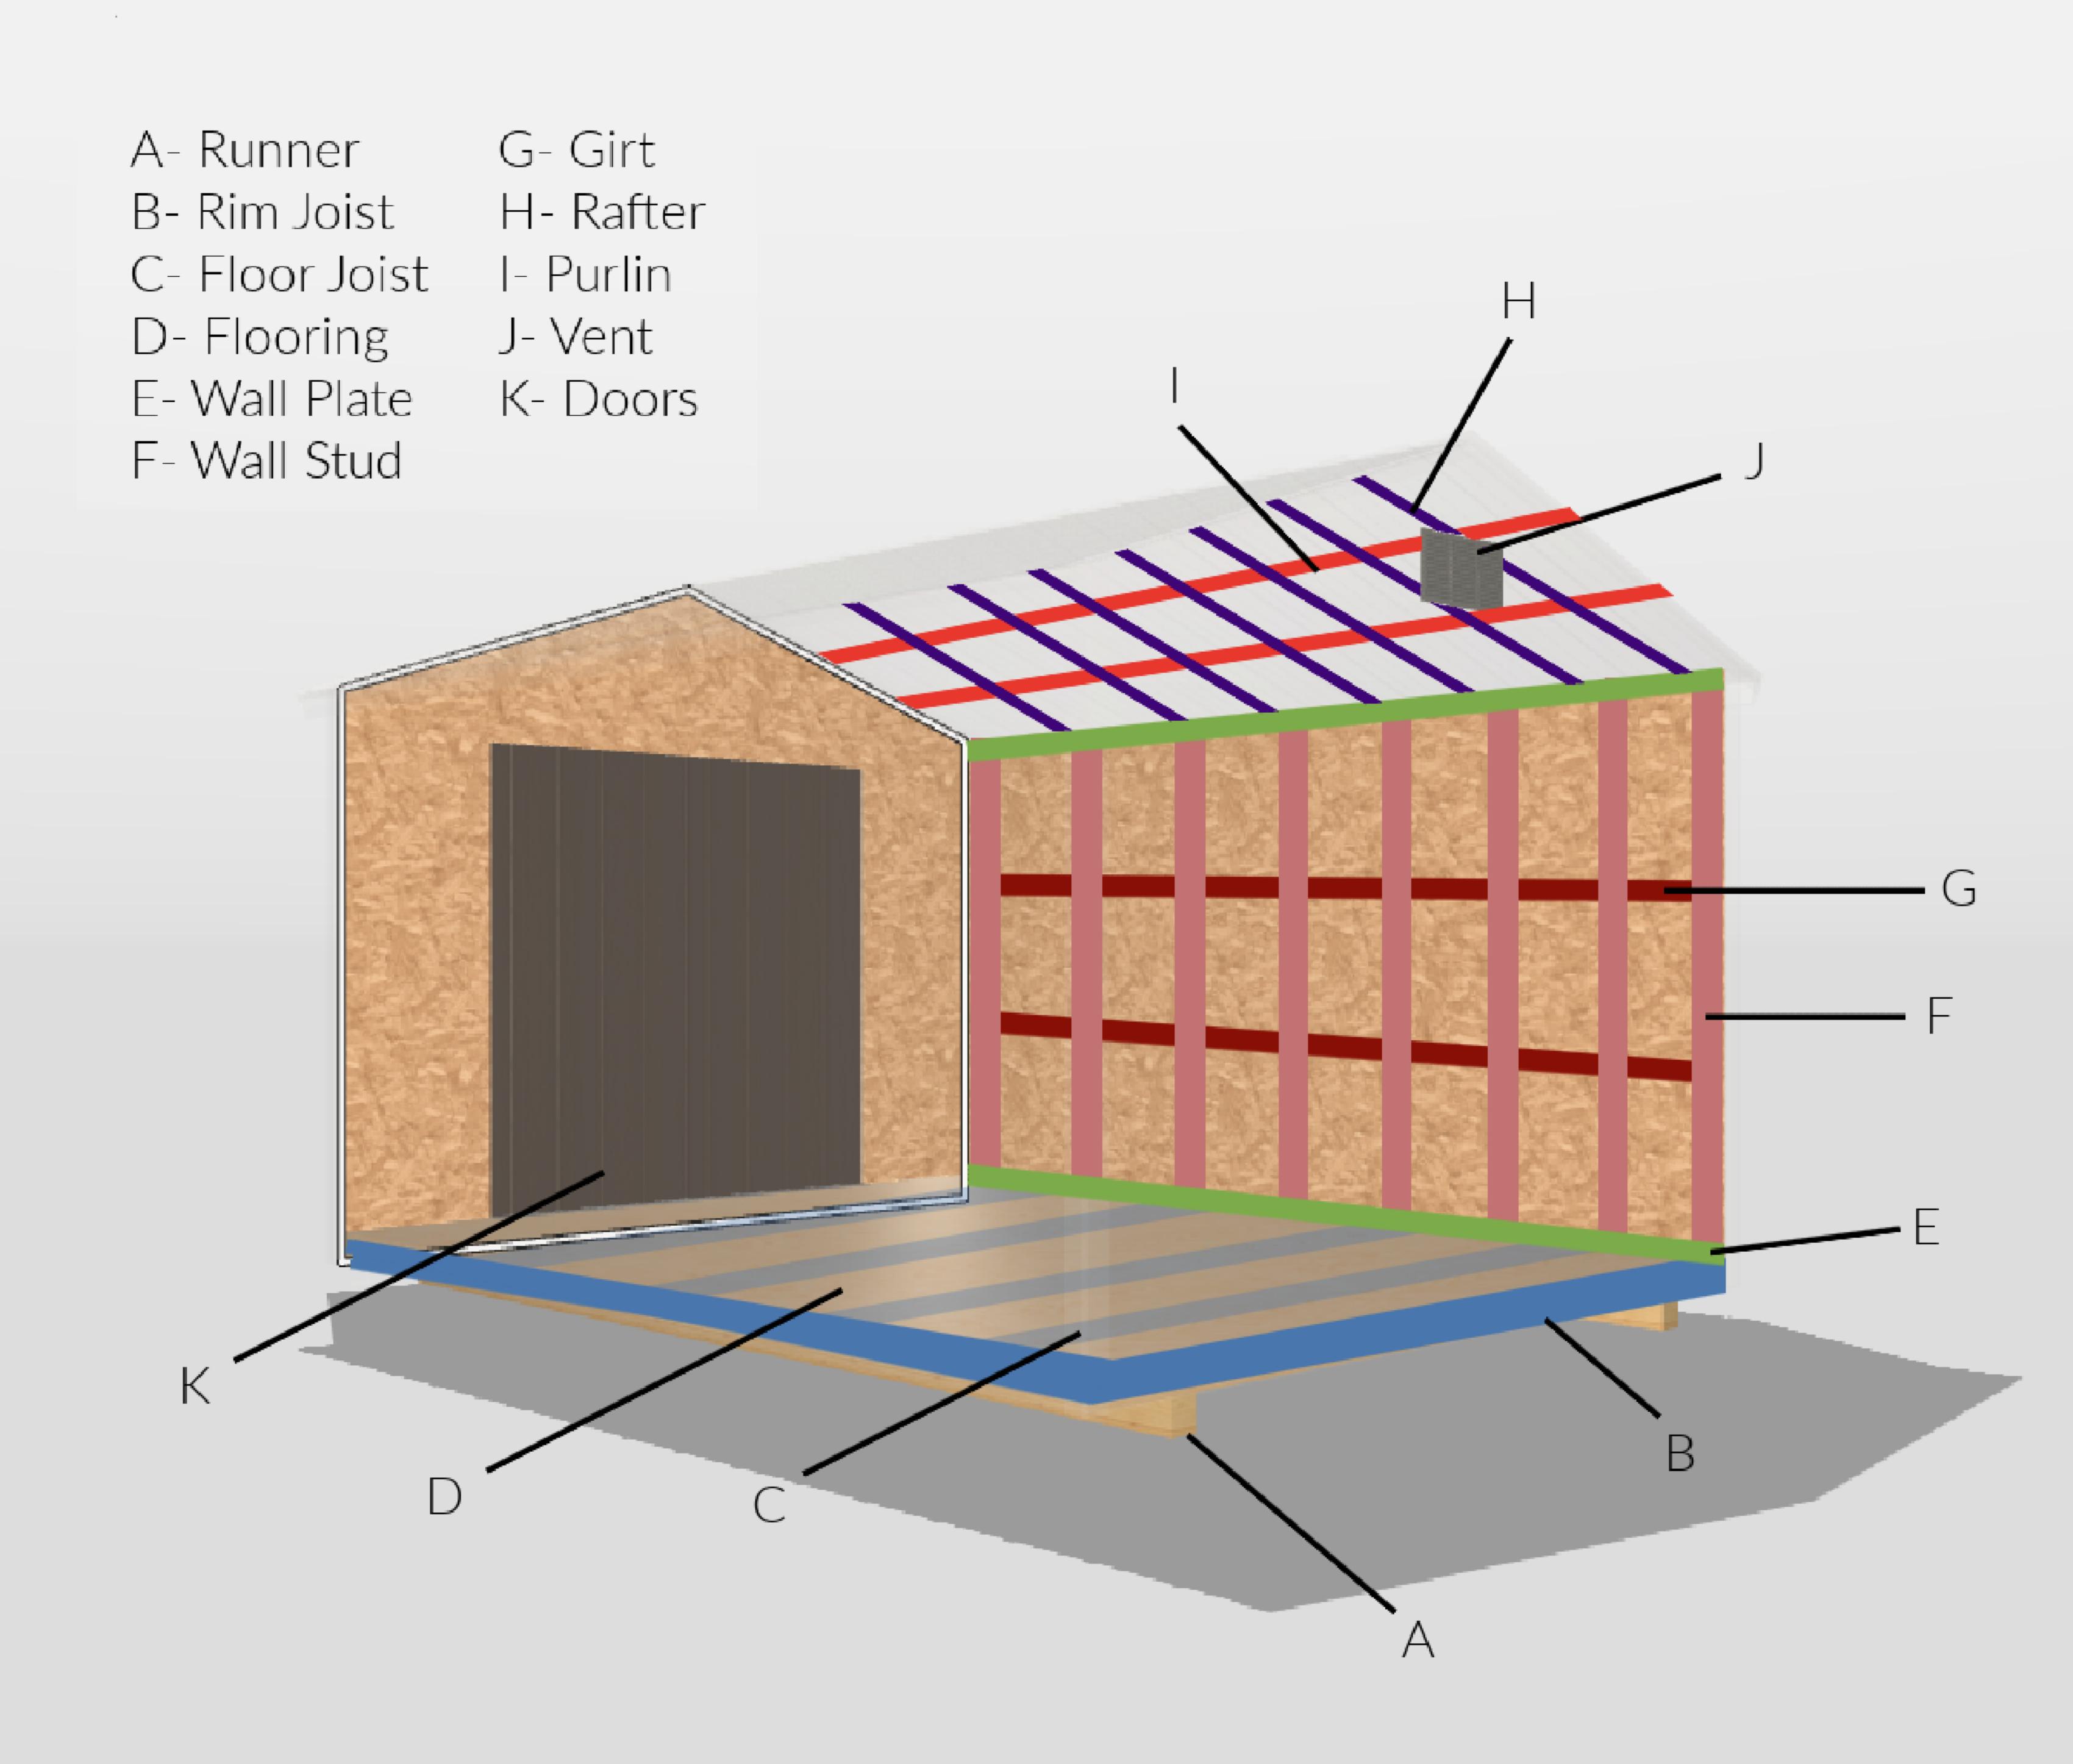

\*\*This diagram shows commonly referred to components and does not show all components that may make up a building. This is a generic diagram and it is important to remember all builders/brands construct their buildings differently. If you have a question regarding a particular component please reach out to your local sales rep, check out the models additional specifications on our website, or call us (270) 789 - 4236.

## Additional Specifications Sloping Ridge - Metal Lofted Cottage

Wall Specs		
Wall Height	6' 3"	
Stud Type	2" x 4"	
Stud Spacing	24" o.c	
Siding	Central States, 29 gauge Panel-Loc Plus metal	
Trim	Central States, 29 gauge metal	
Sheathing	None	
Vents	Building is constructed to vent air through the eaves.	

Roof Specs		
Roof Pitch	Gambrel style	
Rafter Type	2" x 4" (12' Wide gets 2" x 4" loft joists & 14' wide gets 2" x 6" loft joists).	
Rafter Spacing	48" o.c	
Roof Type	Central States, 29 gauge Panel-Loc Plus metal	
Sheathing	Single bubble insulation	

Floor Specs		
Joist Type	2" x 4"	
Joist Spacing	16" o.c	
Flooring	5/8" LP ProStruct Tongue and Groove flooring with SmartFinish	
Runners	4" x 6" Pressure treated runners, notched	
Runner #	10' Wide - 2 runners 12' & 14' wide - 4 runners.	



## Additional Specifications Sloping Ridge - Metal Lofted Cottage

Door Specs		
Standard Door	9-lite or "half glass" door (36" x 72") & 6' double doors.	
	6' Double doors - Width 70" Height - approximately 79.5"	
	Heavy duty aluminum diamond plate	

## Standard Features

(3) 2' x 3' Single pane aluminum window. Lofts: Will recieve half the legnth of building as loft space. Front loft will always be 6' and the remaining legnth will be in rear loft.

4' x 6' Cornor porch.



