
Shedology 101



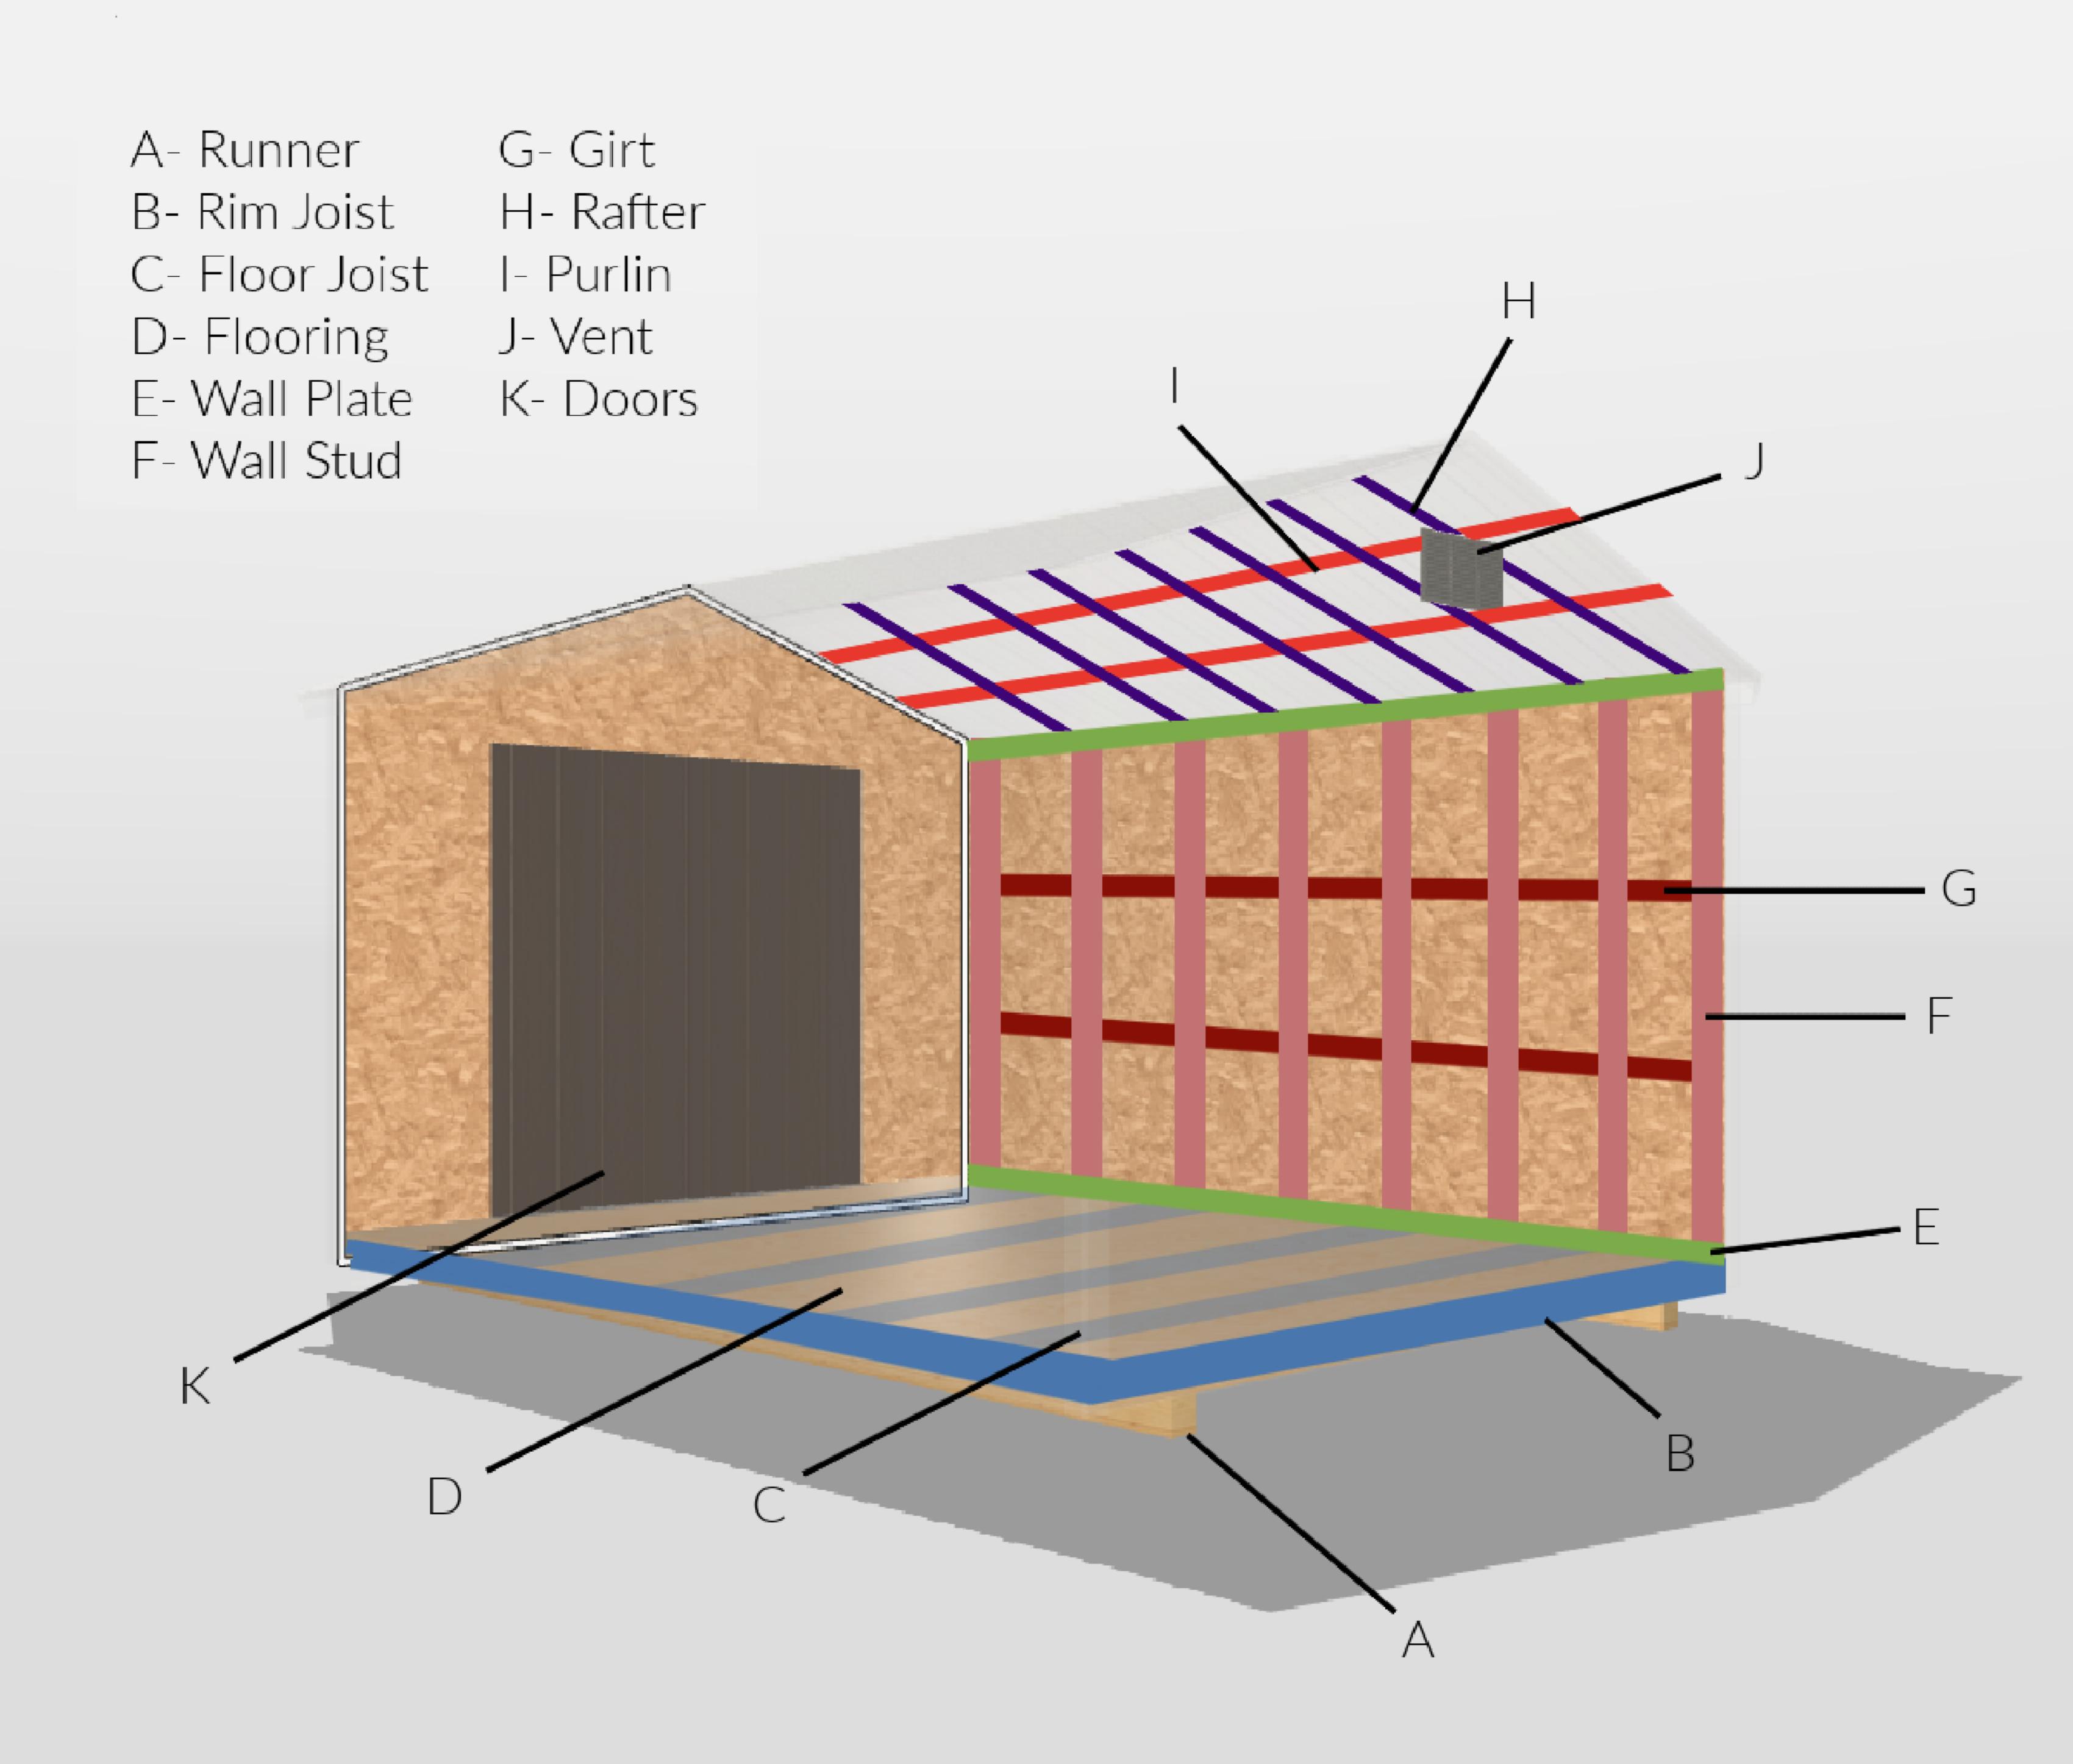

**This diagram shows commonly referred to components and does not show all components that may make up a building. This is a generic diagram and it is important to remember all builders/brands construct their buildings differently. If you have a question regarding a particular component please reach out to your local sales rep, check out the models additional specifications on our website, or call us (270) 789 - 4236.

Additional Specifications Sloping Ridge - Metal Side Loft Barn

Wall Specs		
Wall Height	6' 3"	
Stud Type	2" x 4"	
Stud Spacing	24" o.c	
Siding	Central States, 29 gauge Panel-Loc Plus metal	
Trim	Central States, 29 gauge metal	
Sheathing	None	
Vents	Building is constructed to vent air through the eaves.	

Roof Specs		
Roof Pitch	Gambrel Style	
Rafter Type	2" x 4" (Up to 12' wide gets 2" x 4" loft joists, 14' wide gets 2" x 6").	
Rafter Spacing 48" o.c		
Roof Type	Central States, 29 gauge Panel-Loc Plus metal	
Sheathing	Single bubble insulation	

Floor Specs		
Joist Type	2" x 4"	
Joist Spacing	g 16" o.c	
Flooring	5/8" LP ProStruct Tongue and Groove flooring with SmartFinish	
Runners	4" x 6" Pressure treated runners, notched	
	10' Wide - 3 runners 12' & 14' Wide - 4 runners	



Additional Specifications Sloping Ridge - Metal Side Loft Barn

Door Specs		
Standard Door	6' Double doors	
Door Opening	6' Double doors: Width - 70" Height - Approximately 79.5"	
	Heavy duty aluminum diamond plate	

Standard Features

(2) 2" x 3" Single pane aluminum windows. Lofts: 16' to 20' Long - 4' Loft in each end, 24' to 28' Long - 6' Loft in each end, 32' to 36' Long - 8' Loft in each end, 40" - 48" Long - 12' Loft in each end. (12' Wide recieves single 6' loft).



